

GxI 50i – Clean. Clear. Coding.

The **GxI 50i** Thermal Ink Jet (TIJ) printer is designed for product and packaging coding across many industries like food and beverage, industrial, and healthcare. The small printheads easily fit on production lines and can be mounted up to 25m from the controller. A 7" touchscreen with intuitive user interface enables easy and error-free operation and data input directly on board.



Easy to integrate

Versatile printhead variants to support wide range of applications:

- ◆ Standard range: 12.7mm high and includes a compact printhead option.
- ◆ EXT range: up to 26.1mm per printhead for larger codes, all without the need to stitch.
- ◆ OPT range: 13.5mm codes with a higher throw distance (up to 10mm) for special applications.

Flexible printhead configurations:

- ◆ Dual printhead operation for two sides of line coding, two individual applications or increased message height.
- ◆ Flexible connector options (front, back and top) on all variants.
- ◆ Print speeds up to 300m/min, and resolutions up to 600 DPI - suitable for high-resolution and fast-paced production needs.
- ◆ Track & trace, and item level serialisation via Dynamark protocol: 21 CFR Part 11 compliant, audit trail with comprehensive user administration, validation documentation available.


Easy to operate

- ◆ Easy printer operation and monitoring using the touchscreen or via web browser.
- ◆ Automatic cartridge recognition and ink parameter setting.
- ◆ Continuous Operation: for uninterrupted production, the **AutoSwap** functionality enables cartridge change while printing. A Bulk Ink system is available for long-run operation without the need for any operator intervention.



Clean. Clear. Coding.

- ◆ Graphic printing quality on paper, card, plastic, metal, and many other materials.
- ◆ Flexible label design: text, counters, clocks, graphics, logos, barcodes can all be included on the same label.
- ◆ Grade A code readability (ISO 15415) using Domino'sinks on high density datamatrix codes (module size 40x40, ≤ 169 characters).

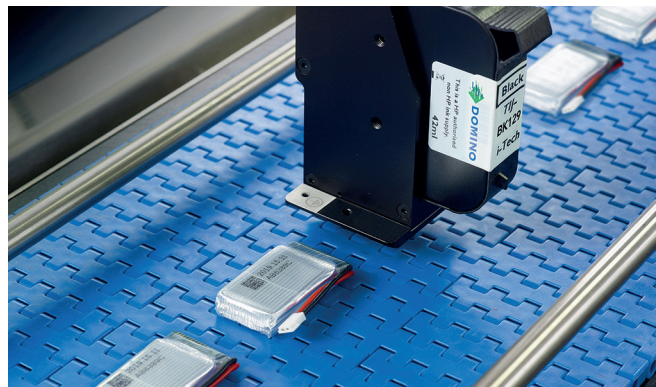

www.domino-printing.com



A complete solution



Our services are designed to provide operational insight so you can eliminate downtime and maximise production efficiency.

Operational support

Our **SafeGuard** packages provide high-quality, on-site assistance, and AR-enabled remote guidance from our engineers, helping us be with you when you need us most.

Automatic code inspection

Automate your code inspection to validate code presence, placement, and readability with Domino's range of vision control systems, R-Series. This ensures every code that leaves your factory is present correct and frees up operator time.

Control software

Minimise errors using Domino's **QuickDesign** software. Control your product codes from a central location and streamline product changeovers. **QuickDesign** uses standard communication protocols and can be integrated into existing ERP systems.

Smart production

Gain operational insight by connecting your printer to **Domino Cloud**. Obtain production analytics dashboards and receive system error alerts. **Domino Cloud** provides you with information to run your operations more efficiently.




Technical specification Gx150i


	Standard	Compact	EXT	OPT
Controller specifications				
Controller dimensions	height: 75mm, width: 224mm, depth: 156.5mm, weight: 1.55kg			
Printhead specification				
Printhead dimensions (TOP variant including connector)	height 162mm, width 28.5mm, depth 52.9mm, weight 0.22kg	height 104.5mm, width 28.5mm, depth 111.1mm, weight 0.29kg	height: 162mm, width: 29.7mm, depth: 68.9mm, weight 0.27kg	height: 158mm, width: 35.7mm, depth: 78mm, weight 0.31kg
Printhead cables	1.5, 3, 6, 12 or 25m			
Printheads per controller	Up to 2 printheads: Stitched for increased message height, or individual printing on 2 different print positions			
Print height	1 printhead: 12.7mm 2 printheads: 25.4mm		1 printhead: 26.1mm 2 printheads: 52.2mm	1 printhead: 13.5mm 2 printheads: 27.1mm
Print speed and horizontal resolution*	up to 300m/min at 60dpi to 30m/min at 600dpi			high speed mode enabled: up to 228m/min at 60dpi to 22m/min at 600 dpi high speed mode disabled: up to 150m/min at 60dpi to 15m/min at 600 dpi
Ownership specification				
External connection options	1 encoder, I/Os for beacons, product detects or other, 2 USBs (type A), RS232C, 2x LAN			
Power connector	6mm DC power jack			
Electrical supply	Input: 100-240V AC, 50-60 Hz, 2 A			
Controller operating temperature	0° - 40°C (32° - 104°F)			
Operating relative humidity	20 - 80% RH (non condensing, 10°C increase per hour)			
Controller finish	Stainless steel			
Communication	Ethernet / Dynamark protocol, EDC (serial, TCP, USB)			
User interface	QuickStep via 7" touch screen or customer HMI			
Continuous operation options	Bulk Ink system for long-run operation, AutoSwap for uninterrupted production			
Consumables**				
Inks	A range of fast drying water and solvent based inks for porous and non-porous substrates, black, colours, and specialist inks			
i-Techx features	Automatic ink cartridge detection, automatic ink parameter setting, automatic ink level recording			

* Ink dependent **This product has a Quality Management System that means that it will only work with Domino circuitry, and it uses dynamic security measures to block non-Domino circuitry from being used. From time to time updates to the circuitry will be issued by Domino to maintain the effectiveness of the Quality Management System


Gx150i controller

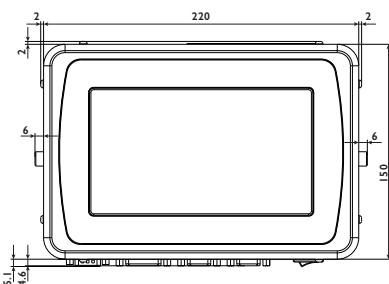


Printer bracket

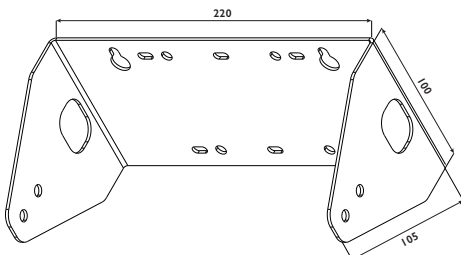


Standard printhead – Top connector

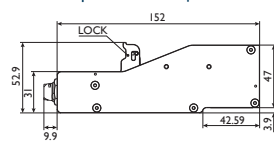


EXT printhead – Top connector

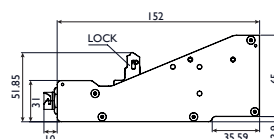

Compact printhead – Top connector

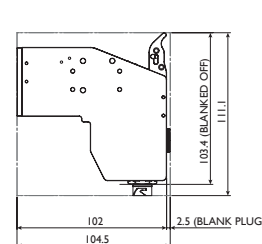

OPT printhead – Top connector

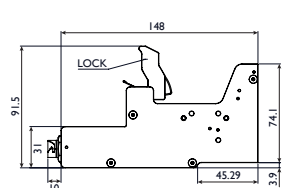

TALK TO AN EXPERT

Contact details: enquiry@dominoindia.com
 Telephone: +91 900 900 6612
 Website: www.domino-printing.com

